


FT »

DECORING

TECHNICAL DATA



The whole series of decorative LED FRAME solution utilizes a uniform extruded aluminium housing with lesser trim size, sleek and seamless design, uniformly lighted through an acrylic diffuser, streamlined aesthetic, perfect solution for general illumination, high visual comfort, higher stability of color rendition, with surface mounting and suspended options, supplied with power supply.

DRIVER	Lighting Control Standard
CRI	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px 5px;">Standard CRI >80</div> <div style="border: 1px solid black; padding: 2px 5px;">CRI >90</div> </div>
BEAM ANGLE	

TECHNICAL DATA

LED	: BRIDGELUX SMD LED
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 60 lm/W (@4500K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@35°C
UGR	: <21

GENERAL

Mounting	: Suspended, Indoor
Housing	: Die-Cast Aluminium
Heat sink	: Aluminium
Diffuser	: Acrylic
Adjustability	: No
Driver Mounting	: Remote
Emergency kit	: Not Available

IP Rating	: IP40
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -40° to 50°C
Glow-wire test	: 960°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K



www.switch-made.com




All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

DECORING


COLOR TEMP.	POWER	LUMENS	CODE
4500K	27 W	1750 lm	INT12080
4500K	40 W	2530 lm	INT12082
4500K	54 W	3420 lm	INT12084

3000K 400K

DIMENSION

IMAGE	DIMENSION (MM)
	400 25 15/45
	600 25 15/45
	800 25 15/45

Pendant Kit Accessories

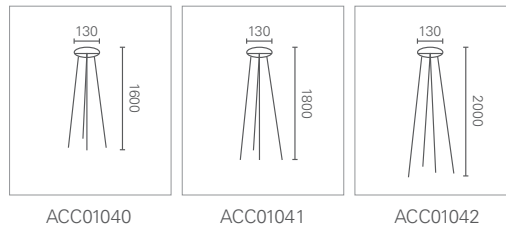

Suspension cable height: 1.4m

Cover shade accessories are available in *opal* and *opal prismatic* options

NOTES

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	