


FT »

ROUND

TECHNICAL DATA



The whole series of decorative LED FRAME solution utilizes a uniform extruded aluminium housing with lesser trim size, sleek and seamless design, uniformly lighted through an acrylic diffuser, streamlined aesthetic, perfect solution for general illumination, high visual comfort, higher stability of color rendition, with surface mounting and suspended options, supplied with power supply.

DRIVER	Lighting Control Standard
CRI	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <small>Standard</small> CRI >80 </div> <div style="text-align: center;"> CRI >90 </div> </div>
BEAM ANGLE	<div style="text-align: center;">  <p>120°</p> </div>
FINISH	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <small>White (WH)</small> </div> <div style="text-align: center;"> <small>Grey (GY)</small> </div> <div style="text-align: center;"> <small>Black (BK)</small> </div> </div>

TECHNICAL DATA

LED	: BRIDGELUX SMD LED
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 90 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@35°C
UGR	: <21

GENERAL

Mounting	: Surface mounted, suspended, Indoor
Housing	: Die-Cast Aluminium
Heatsink	: Aluminium
Diffuser	: Acrylic
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: Not Available

IP Rating	: IP20
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -40° to 50°C
Glow-wire test	: 960°
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K



FT »

ROUND

TECHNICAL DATA



ROUND


COLOR TEMP.	POWER	LUMENS	CODE
4000K	13 W	1340 lm	INT12025
4000K	25 W	2680 lm	INT12028
4000K	48 W	4563 lm	INT12031
4000K	110 W	10560 lm	INT12034
4000K	200 W	18670 lm	INT12037

3000K 4000K

DIMENSION

IMAGE	DIMENSION (MM)	COVER SHADE (MM)

Pendant Kit Accessories

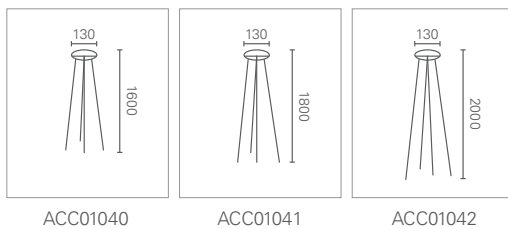

Cover shade accessories are available in *opal* and *opal prismatic* options

NOTES

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

CE RoHS