




FT





CANNON 1

TECHNICAL DATA



	100-264 Vac	IP66	IK08	CRI >80	CREE XHP35 LED
---	-------------	------	------	---------	----------------

Discreet and compact aesthetically designed architectural outdoor spotlight in two body sizes, ideal for accent lighting, with single high power LED, die-cast aluminium body, stainless steel screws, 6mm toughened glass, flexibility in lighting effect, extremely narrow to wide beam options, highly reliable, suitable for a variety of mounting applications including ground, wall, tree, sign and architectural accents, integral driver, easy installation.

DRIVER CC, 900mA, 10Vdc	Lighting Control Standard
CRI	Standard CRI >80 CRI >90
BEAM ANGLE	
FINISH	Grey - RAL9023 (GY) 

TECHNICAL DATA

LED	: CREE XHP35
System Power	: 10 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 89 lm/W (@4000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: <23

GENERAL

Mounting	: Surface mounted, Pole mounted, Spike, Outdoor
Housing	: ADC12 Die-cast aluminium
Lens	: PMMA
Diffuser	: Tempered glass
Adjustability	: Yes
Driver Mounting	: Integrated
Emergency kit	: Not Available

IP Rating	: IP66
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 60°C
Glow-wire test	: 960°
Weight	: 1.80 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K 6000K

FT »

CANNON 1

TECHNICAL DATA




CANNON 1



COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	1 pcs.	10 W	840 lm	EXT04126-27K
3000K			860 lm	EXT04126-30K
4000K			894 lm	EXT04126-40K

2700K 3000K 4000K 5000K 6000K

DIMENSION

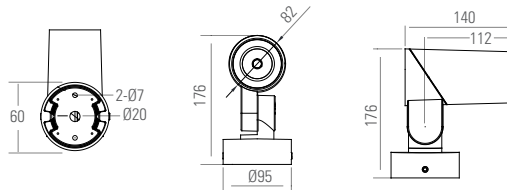


MOUNTING OPTION

CANNON 1 SPIKE



CANNON 1 BRACKET

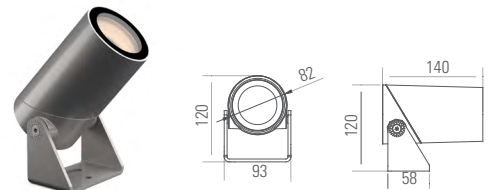

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 22, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.