




FT





# CHROME 8-S

## TECHNICAL DATA



	220-240V 50-60Hz	IP43	100 lm/W	CRI >80/>90/>97	DIMMABLE <b>DALI/1-10V</b> <i>Optional</i>
---	---------------------	------	----------	--------------------	--

Square LED recessed downlight, high efficient spot light with elegant optical design, housing made of machined aluminium with sand white/black powder-coated finishing, passive extruded aluminium heatsink ensuring better heat dissipation, high reflection ratio aluminium reflector, durable and robust structure, SDCM<2, consistent color stability, dimmable versions available, various beam angle choices.

DRIVER CC, 350mA, 17.8VDC	Standard	Lighting Control Phase Dim. 1-10V DALI
CRI	Standard CRI >80	CRI >90 CRI >97
BEAM ANGLE	 	

### TECHNICAL DATA

LED	: BRIDGELUX V8
MacAdam Step	: <3 SDCM
Luminaire Efficacy	: 90 lm/W (@4000K)
Lifetime	: L <sub>70</sub> B <sub>50</sub> 50,000Hrs, Ta@35°C
UGR	: <19

### GENERAL

Mounting	: Ceiling recessed, Indoor
Housing	: Die-cast aluminium
Reflector	: Aluminium
Diffuser	: Clear glass
Adjustability	: No
Driver mounting	: Remote
Emergency kit	: Optional

IP Rating	: IP43
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 50°C
Glow-wire test	: 960°C
Weight	: 0.43 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

FT »

# CHROME 8-S

## TECHNICAL DATA

### CHROME 8-S



COLOR TEMP.	POWER	LUMENS	CODE
2700K	8 W	600 lm	INT05040-27K
3000K		650 lm	INT05040-30K
4000K		720 lm	INT05040-40K


2700K 3000K 4000K 5000K

#### FINISH

White(WH) Grey(GY) Black(BK)



#### DIMENSION

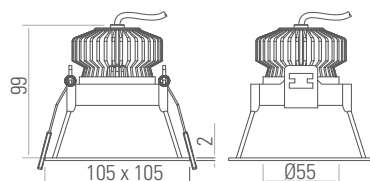

#### NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT  
LUMINAIRE REF.  
QUANTITY  
DATE

Contact Name  
Mobile  
Email