




FT




## CHROME 28-S

### TECHNICAL DATA



	220-240V 50-60Hz	IP43	100 lm/W	CRI >80/>90/>97	DIMMABLE <b>DALI/1-10V</b> Optional
---	---------------------	------	----------	--------------------	---

Square LED recessed downlight, high efficient spot light with elegant optical design, housing made of machined aluminium with sand white/black powder-coated finishing, passive extruded aluminium heatsink ensuring better heat dissipation, high reflection ratio aluminium reflector, durable and robust structure, SDCM<2, consistent color stability, dimmable versions available, various beam angle choices.

DRIVER CC, 700mA, 35Vdc	Standard	Lighting Control Phase Dim. 1-10V DALI
CRI	Standard CRI >80	CRI >90 CRI >97
BEAM ANGLE		

#### TECHNICAL DATA

LED	: CITIZEN 1208
MacAdam Step	: <3 SDCM
Luminaire Efficacy	: 98 lm/W (@4000K)
Lifetime	: L <sub>70</sub> B <sub>50</sub> 50,000Hrs, Ta@35°C
UGR	: <19

#### GENERAL

Mounting	: Ceiling recessed, Indoor
Housing	: Die-cast aluminium
Reflector	: Aluminium
Diffuser	: Clear glass
Adjustability	: Yes
Driver mounting	: Remote
Emergency kit	: Optional
IP Rating	: IP43
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 50°C
Glow-wire test	: 960°C
Weight	: 1.08 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

FT »

# CHROME 28-S

## TECHNICAL DATA

### CHROME 28-S




COLOR TEMP.	POWER	LUMENS	CODE
2700K	28 W	2450 lm	INT05049-27K
3000K		2550 lm	INT05049-30K
4000K		2750 lm	INT05049-40K


2700K 3000K 4000K 5000K

#### FINISH

White(WH) Grey(GY) Black (BK)



#### DIMENSION

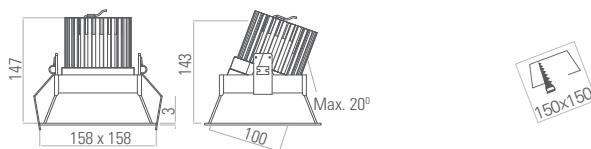


#### ADJUSTABILITY

TILTABLE



FIXED

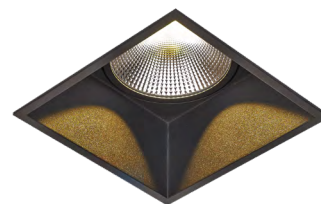

#### NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT  
LUMINAIRE REF.  
QUANTITY  
DATE

Contact Name  
Mobile  
Email



www.switch-made.com

Updated on April 22, 2022

All technical specifications and datas are subject to modification at any time and without notice.  
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.