

FT





## CHROME 28-R

### TECHNICAL DATA



	220-240V 50-60Hz	IP44	100 lm/W	CITIZEN 1208 LED	CRI >80/>90/>97	DIMMABLE <b>DALI/1-10V</b> <i>Optional</i>
---	---------------------	------	----------	---------------------	--------------------	--

Round LED deep recessed downlight, highly diverse lumen levels, elegant optical design, housing made of machined aluminium with sand white/black powder-coated finishing, passive extruded aluminium heatsink ensuring better heat dissipation, high reflection ratio aluminium reflector, durable and robust structure, SDCM<2, consistent color stability, dimmable versions available, various beam angle choices.

DRIVER CC, 700mA, 35VDC	Standard	Lighting Control Phase Dim. 1-10V DALI
CRI	CRI >80	Standard CRI >90 CRI >97
BEAM ANGLE	 24°	 45°

#### TECHNICAL DATA

LED	: CITIZEN 1208 LED
MacAdam Step	: <3 SDCM
Luminaire Efficacy	: 111 lm/W (@4000K)
Lifetime	: L <sub>70</sub> B <sub>50</sub> 50,000Hrs, Ta@35°C
UGR	: <19

#### GENERAL

Mounting	: Ceiling recessed, Indoor
Housing	: Die-cast aluminium
Reflector	: Aluminium
Diffuser	: Clear glass
Adjustability	: Yes
Driver mounting	: Remote
Emergency kit	: Optional
IP Rating	: IP44
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 50°C
Glow-wire test	: 960°C
Weight	: 0.88 Kg
Warranty	: 3 yrs (extendable to 5 yrs)



FT »

# CHROME 28-R

## TECHNICAL DATA

### CHROME 28-R



COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	28 W	90+	2800 lm	INT05029-27K
3000K			2980 lm	INT05029-30K
4000K			3100 lm	INT05029-40K


2700K 3000K 4000K 5000K

#### FINISH

White(WH) Grey(GY) Black (BK)



#### DIMENSION

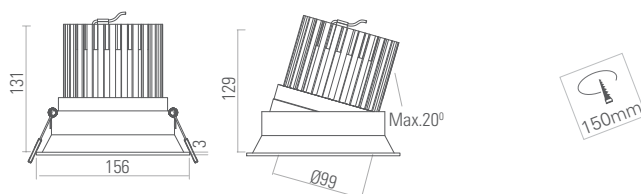

#### NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	