



FT



COMET PC-SEALED 600

TECHNICAL DATA



	220-240 Vac	IP65	IK08	CRI >80	SMD 2835	100 lm/W	1-10V/DALI Optional
---	----------------	------	------	------------	----------	----------	------------------------

Rigid and delicate design weatherproof luminaire without any clips, smooth linearity with ease of installation, highly sealed for extreme weather conditions, high corrosion resistance, high quality opal PC diffuser, PC body offering IP65 protection against moisture, dust, corrosion, steel reflector base, durable silicone rubber gasket, 3 pin fast-connector for fast-easy connection, integrated driver, delivered with metal surface mounting kit and pendanthook.

DRIVER
CC,

Lighting Control
Standard

CRI

Standard
CRI >80 CRI >90

BEAM ANGLE



FINISH

White (WH)

TECHNICAL DATA

LED	: SMD 2835 LED
System Power	: 20 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 100 lm/W (@6500K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: <23

GENERAL

Mounting	: Ceiling, wall mounted, Outdoor
Housing	: PC
Heatsink	: Aluminium
Diffuser	: Opal PC
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: Optional

IP Rating	: IP65
IK Rating	: IK08
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 55°C
Glow-wire test	: 850°
Weight	: 0.8 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 6500K


www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.


COMET PC - SEALED 600



COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1880 lm	EXT19006-30K
4000K		1930 lm	EXT19006-40K
6500K		2000 lm	EXT19006-65K

3000K 4000K 5000K 6500K

DIMENSION

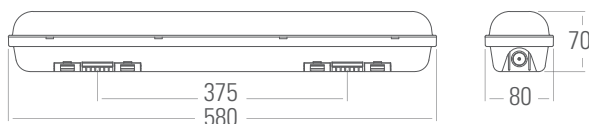

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	

Contact Name	
Mobile	
Email	