



FT



CRUG 25

TECHNICAL DATA



	100-305 Vac	IP66	IK08	CRI >80	CREE XP-L LED	DALI/0-10V <i>Optional</i>
---	-------------	------	------	---------	---------------	--------------------------------------

Compact architectural and stylish outdoor innovative projector for variety of floodlighting applications, ideal for accent lighting, available in different sizes/ wattage options, with 25 high power LEDs, high-pressure die-casting aluminium body, stainless steel screws, high strength 6mm toughened glass, extremely narrow to wide beam options, rotationally symmetric light distribution, integrated power supply with dimmable options, optional model in 85W also available.

DRIVER
CC, 1400mA, 65Vdc


Lighting Control

Standard ☐ 1-10V ☐ DALI

CRI

Standard
☐ CRI >80 ☐ CRI >90

BEAM ANGLE



FINISH

Grey - RAL9023 (GY)

TECHNICAL DATA

LED	: CREE XP-L LED
System Power	: 120 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 96 lm/W (@4000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: <23

GENERAL

Mounting	: Surface mounted, Pole mounted, Outdoor
Housing	: ADC12 Die-cast aluminium
Lens	: PMMA
Diffuser	: Tempered glass
Adjustability	: Yes
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP66
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 60°C
Glow-wire test	: 960°
Weight	: 10 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K 6000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

FT »

CRUG 25

TECHNICAL DATA




CRUG 25



COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	25 pcs.	120 W	10790 lm	EXT04102-27K
3000K			11040 lm	EXT04102-30K
4000K			11480 lm	EXT04102-40K


2700K 3000K 4000K 5000K 6000K

DIMENSION

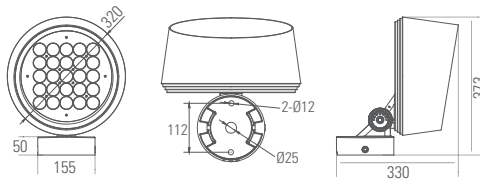


MOUNTING OPTION

CRUG 25 POLE



CRUG 25 BRACKET

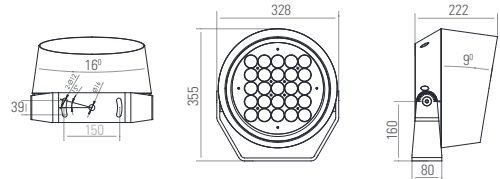

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT
LUMINAIRE REF.
QUANTITY
DATE

Contact Name
Mobile
Email

www.switch-made.com

Updated on April 22, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.