



FT



CRUG 24 RGBW

TECHNICAL DATA



	100-305 Vac	IP66	IK08	RGBW	DMX512	CREE XM-L LED	DALI/0-10V Optional
---	-------------	------	------	------	--------	---------------	-------------------------------

Compact architectural and stylish outdoor innovative projector for variety of floodlighting applications, ideal for accent lighting, available in different sizes/ wattage options, with 24 high power LEDs, high-pressure die-casting aluminium body, stainless steel screws, high strength 6mm toughened glass, extremely narrow to wide beam options, rotationally symmetric light distribution, integrated power supply with dimmable options, optional model in 200W also available.


DRIVER
CV, 36Vdc, 0-5000mA

Lighting Control
Standard

LED

RGBW 4 in 1

BEAM ANGLE



FINISH

Grey - RAL9023 (GY)

TECHNICAL DATA

LED	: CREE XM-L LED
System Power	: 150 W
MacAdam Step	: SDCM <3
LED Qty.	: 24 Pcs.
Lifetime	: $L_{70} B_{50}$ 50,000Hrs, Ta@35°C
UGR	: <23

GENERAL

Mounting	: Surface mounted, Pole mounted, Outdoor
Housing	: ADC12 Die-cast aluminium
Lens	: PMMA
Diffuser	: Tempered glass
Adjustability	: Yes
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP66
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 60°C
Glow-wire test	: 960°
Weight	: 10 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

FT »

CRUG 24 RGBW

TECHNICAL DATA





CRUG 24 RGBW




COLOR	LED QTY.	POWER	CODE
RGBW	24 pcs. RGBW 4 in 1	150 W	EXT04104-RGBW

DIMENSION

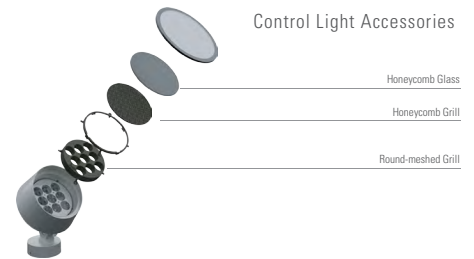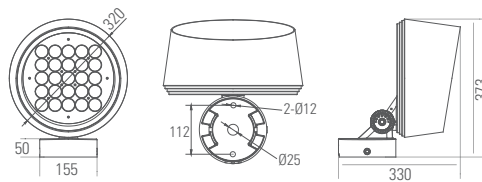

MOUNTING OPTION

CRUG 24 RGBW POLE

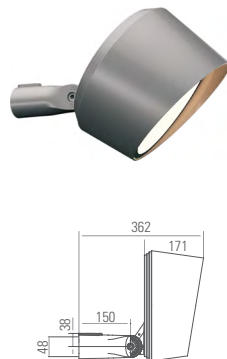

CRUG 24 RGBW BRACKET



NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT
LUMINAIRE REF.
QUANTITY
DATE

Contact Name
Mobile
Email

www.switch-made.com

Updated on April 22, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.