



FT



CRUG 4 RGBW

TECHNICAL DATA



24Vdc

IP66

IK08

RGBW

DMX512

CREE
XM-L LED

Compact architectural and stylish outdoor innovative projector for variety of floodlighting applications, ideal for accent lighting, with 4 high power LEDs, high-pressure die-casting aluminium body, stainless steel screws, high strength 6mm toughened glass with 90% light transmittance, extremely narrow to wide beam options, rotationally symmetric light distribution, integrated power supply with dimmable options, spike/pole mounting version also available.


DRIVER
24Vdc

Lighting Control
Standard

LED

RGBW 4 in 1

BEAM ANGLE



FINISH

Grey - RAL9023 (GY)



TECHNICAL DATA

LED	: CREE XM-L LED
System Power	: 20 W
MacAdam Step	: SDCM <3
LED Qty.	: 4 Pcs.
Lifetime	: $L_{70} B_{50}$ 50,000Hrs, Ta@35°C
UGR	: <23

GENERAL

Mounting	: Surface mounted, Pole mounted, Outdoor
Housing	: ADC12 Die-cast aluminium
Lens	: PMMA
Diffuser	: Tempered glass
Adjustability	: Yes
Driver Mounting	: Remote
Emergency kit	: Not available

IP Rating	: IP66
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 60°C
Glow-wire test	: 960°
Weight	: 1.90 Kg
Warranty	: 3 yrs (extendable to 5 yrs)



FT »

CRUG 4 RGBW

TECHNICAL DATA







CRUG 4 RGBW




COLOR	LED QTY.	POWER	CODE
RGBW	4 pcs. RGBW 4 in 1	20 W	EXT04120-RGBW

DIMENSION

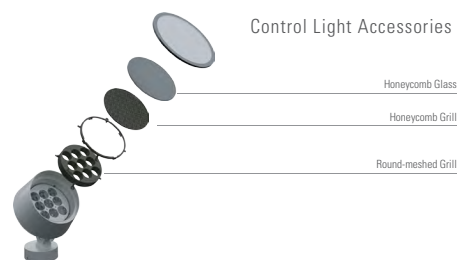


MOUNTING OPTION


CRUG 4 POLE




CRUG 4 SPIKE



CRUG 4 BRACKET-A




CRUG 4 BRACKET-B



(Pole dia: 67-325mm, T > 4)

CRUG 4 BELT



(Pole dia: 168-268mm)

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 22, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.