

FT



ECLIPSE SUSPENDED 300

TECHNICAL DATA



200-240
Vac

IP40

UGR
19

IK06

CRI
>80

DIMMABLE
TRIAC

Creative hollow shaped design which provide a strong sense of space, the curved light direction emphasizes target object in a smooth and dramatic atmosphere, revealing an unexpected art inspiration design, high visual comfort, consistent color stability, high quality of light with homogenous light, rotatable buckle on the base to make installation easier and faster, integrity to have it in suspended or surface mounted options.

DRIVER
CC, 300mA, 65-78Vdc

Lighting Control
Standard

CRI

Standard
CRI >80

CRI >90

BEAM ANGLE



FINISH

White (WH)

Grey (GY)

Black (BK)

TECHNICAL DATA

LED : SMD 2835 LED
System Power : 25 W
MacAdam Step : SDCM <3
Luminaire Efficacy : 80 lm/W (@5700K)
Lifetime : L₈₀B₁₀ 50,000Hrs, Ta@25°C
UGR : <19

GENERAL

Mounting : Suspended, Indoor
Housing : Die-cast aluminium
Heat Sink : Aluminium
Diffuser : PC
Adjustability : No
Driver Mounting : Integrated
Emergency kit : Not Available

IP Rating : IP40
IK Rating : IK06
Protection Class IEC : I
Energy Class : A++
Working Temp. : -20° to 45°C
Glow-wire test : 960°
Weight : 1.00 Kg
Warranty : 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 5700K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

FT »

ECLIPSE SUSPENDED 300

TECHNICAL DATA




ECLIPSE SUSPENDED 300



COLOR TEMP.	POWER	LUMENS	CODE
4000K	25 W	1900 lm	INT01208-40K
5700K		2000 lm	INT01208-57K

3000K 4000K 5000K 5700K

DIMENSION

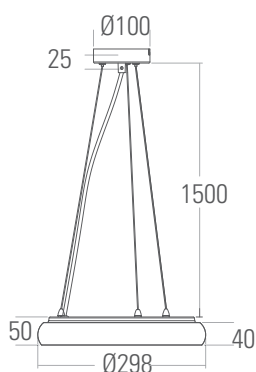

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	



www.switch-made.com

Updated on April 15, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.