



FT



ECLIPSE SURFACE MOUNTED 300

TECHNICAL DATA


200-240
Vac

IP40

UGR
<19

IK06

CRI
>80

DIMMABLE
TRIAC

Creative hollow shaped design which provide a strong sense of space, the curved light direction emphasizes target object in a smooth and dramatic atmosphere, revealing an unexpected art inspiration design, high visual comfort, consistent color stability, high quality of light with homogenous light, rotatable buckle on the base to make installation easier and faster, integrity to have it in suspended or surface mounted options.

DRIVER
CC, 300mA, 65-78Vdc

Lighting Control

Standard

Phase Dim.

CRI

Standard

CRI >80

CRI >90

BEAM ANGLE



FINISH

White (WH)

Grey (GY)

Black (BK)

TECHNICAL DATA

LED	: SMD 2835 LED
System Power	: 25 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 77 lm/W (@4000K)
Lifetime	: L _{80 B10} 50,000Hrs, Ta@25°C
UGR	: <19

GENERAL

Mounting	: Surface mounted, Indoor
Housing	: Die-cast aluminium
Heatsink	: Aluminium
Diffuser	: PC
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: Not Available

IP Rating	: IP40
IK Rating	: IK06
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 45°C
Glow-wire test	: 960°
Weight	: 0.8 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 5700K


www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

FT



ECLIPSE SURFACE MOUNTED 300

TECHNICAL DATA




ECLIPSE SURFACE MOUNTED 300



COLOR TEMP.	POWER	LUMENS	CODE
4000K	25 W	1900 lm	INT01201-40K
5700K		2000 lm	INT01201-57K

3000K 4000K 5000K 5700K

DIMENSION

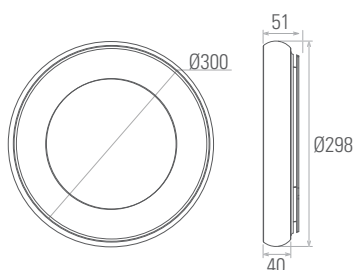

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	



www.switch-made.com

Updated on April 25, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.