

FT »

FLOPY

TECHNICAL DATA


	100-240 Vac	IP55	IK07	PF >0.9	CRI >70
---	-------------	------	------	---------	---------

Elegant and simple design street light luminaire, striking form of seamless construction, slim and discreet presence during the day reflects the urban culture and modern design, aluminium structure, tempered glass diffuser, high power LED module, powder coated, anti-corrosion and anti-impact construction, custom made requirements, easy installation and maintenance, available in different beam options and pole lengths, delivered with pole.

DRIVER
Lighting Control
Standard

CRI
Standard
CRI >80 CRI >90

BEAM ANGLE



FINISH

White (WH) Grey (GY) Black (BK)

TECHNICAL DATA

LED : CREE LED
System Power : 30 W
MacAdam Step : SDCM <3
Luminaire Efficacy : 80 lm/W (@5000K)
Lifetime : L_{80 B10} 50,000Hrs, Ta@35°C

GENERAL

Mounting : Pole mounted, Outdoor
Housing : Die-cast aluminium
Heat Sink : Aluminium
Diffuser : Tempered glass
Adjustability : No
Driver Mounting : Integrated
Emergency kit : Not available

IP Rating : IP55
IK Rating : IK07
Protection Class IEC : I
Energy Class : A+
Working Temp. : -20° to 55°C
Glow-wire test : 750°
Weight : -
Warranty : 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 6000K

FT »

FLOPY

TECHNICAL DATA




FLOPY



COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2020 lm	EXT13024-30K
4000K		2200 lm	EXT13024-40K
6000K		2400 lm	EXT13024-60K

3000K 4000K 5000K 6000K

DIMENSION

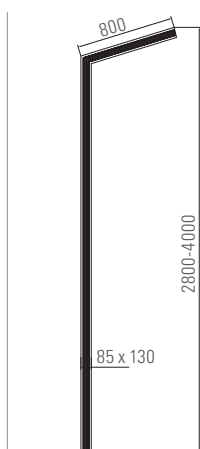

COLOR
(Optional)



NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 15, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.