



FT



HUBI - Em

TECHNICAL DATA


220-240
Vac

IP65

IK10

SMD LED

LED wall mounted luminaire with round shaped bulkhead, uniformly diffused ambient lighting, vandal resistant design, optimum visual comfort in extreme weather conditions, die-cast aluminium housing, outdoor UV resistant powder coat finish, 316L stainless steel screws, integrated driver, fire-resistant silicone seal waterproof gasket.

DRIVER
CC, 150mA/ CC, 150mA
60-80Vdc

Lighting Control
Standard Triac

CRI

Standard
CRI >80

CRI >90

BEAM ANGLE



FINISH

Black
RAL9005 (BK)

TECHNICAL DATA

LED	: SMD LED
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 87 lm/W (@5000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: -

GENERAL

Mounting	: Surface mounted, Outdoor
Housing	: Die-cast Aluminium
Heatsink	: PC
Diffuser	: Aluminium PC
Adjustability	: No
Driver Mounting	: Built-in
Emergency kit	: Yes

IP Rating	: IP65
IK Rating	: IK10
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 45°C
Glow-wire test	: 750°
Weight	: 1.15 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 5700K


www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

HUBI - Em 12



COLOR TEMP.	POWER	LUMENS	CODE
3000K	12 W	1050 lm	EXT06088-30K-12W
4000K		1150 lm	EXT06088-40K-12W
5000K		1250 lm	EXT06088-50K-12W


HUBI - Em 18



COLOR TEMP.	POWER	LUMENS	CODE
3000K	18 W	1500 lm	EXT06088-30K-18W
4000K		1675 lm	EXT06088-40K-18W
5000K		1850 lm	EXT06088-50K-18W

3000K 4000K 5000K 5700K

DIMENSION

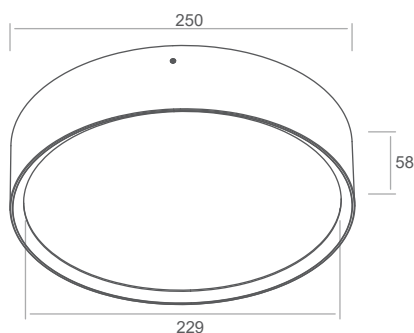

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	