



FT



KUBI 36

TECHNICAL DATA



	220-240 Vac	IP65	IK08	85 lm/W	RGB (optional)
---	-------------	------	------	---------	----------------

High-contrast outdoor accent lighting solution with different size-wattage choices, 36 high power LEDs, uniform light distribution, improved optics with various light distribution patterns, die-cast aluminium body, tempered safety glass, anti-impact abrasion resistant, high heat dissipation, can be installed on ground/ceiling/wall mounted, optimal solution for outdoor architectural and landscape lighting applications, optional RGB model in 12R12G12B 75W also available.

DRIVER
CC, 1400mA, 35-69Vdc


Lighting Control

Standard ☐ DALI ☐

CRI

Standard
☐ CRI >80 ☐ CRI >90

BEAM ANGLE



FINISH

White (WH) ☐ Grey (GY) ☐ Black (BK) ☐

TECHNICAL DATA

LED	: CREE XPE
System Power	: 75 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 85 lm/W (@5000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: -

GENERAL

Mounting	: Surface mounted, Outdoor
Housing	: Die-cast aluminium
Lens	: PMMA
Diffuser	: Tempered glass
Adjustability	: Yes
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP65
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 55°C
Glow-wire test	: 850°
Weight	: 4.50 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6000K

FT »

KUBI 36

TECHNICAL DATA




KUBI 36



COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
3000K	36 pcs.	75 W	6100 lm	EXT04202-30K
4000K			6250 lm	EXT04202-40K
6000K			6400 lm	EXT04202-60K

3000K 4000K 6000K

DIMENSION

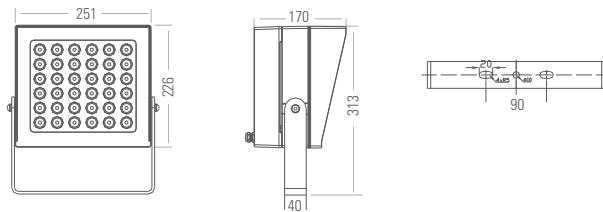

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 25, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.