



FT

LED MODULE 3

TECHNICAL DATA



Chain of LED modules with different wattage ranges, encapsulated housing with IP65 rated protection ensures it as a robust, versatile, durable and reliable solution for the illumination of advertising, signage, LED backlighting applications, consistent illumination, modules are connected with flexible cables, easy to install and shape to fit, with double adhesive tape on the back and provision to screw on to the surface, can be used for outdoor environment conditions within enclosed light boxes.

DRIVER 12Vdc	Lighting Control Standard
CRI	<div>CRI >70</div> <div>Standard</div> <div>CRI >80</div>
BEAM ANGLE	
FINISH	<div>White (WH)</div>

TECHNICAL DATA

LED	: SMD 2835 LED
System Power	: 3 W / Module
MacAdam Step	: <3 SDCM
Luminaire Efficacy	: 105 lm/W (@6500K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@35°C
Lamp Pitch	: 27.5mm (2 LED Lamps)
Module Pitch	: 320mm
LED Qty	: 3 LED / Module
No. Of Module / Meter	: 3 Module / m (9W/m)
No. Of Module / Chain	: 20 Module / Chain (6.4 m / Chain)


GENERAL

Mounting	: Surface Mounted, Backlighting
Material	: Fiber Glass
Adjustability	: No
Driver Mounting	: Remote
Emergency kit	: NA

IP Rating	: IP65
IK Rating	: IK06
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -40° to 85°C
Glow-wire test	: 850°C, 5 sec
Weight	: 0.023 Kg / Module
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6500K 7500K


LED MODULE 3



COLOR TEMP.	POWER / MODULE	LUMENS/MODULE	CODE
3000K	3 W	285 lm	EXT11007-30K
4000K		300 lm	EXT11007-40K
6500K		315 lm	EXT11007-65K

2700K 3000K 4000K 5000K 6500K

DIMENSION

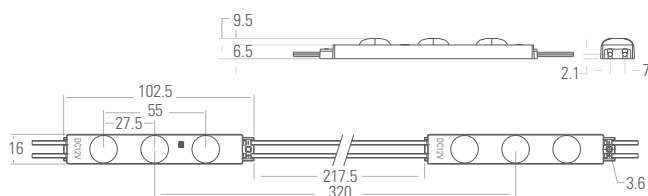

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	

Contact Name	
Mobile	
Email	