



FT



LINEA 600

TECHNICAL DATA



	100-240 Vac	IP44	IK06	CRI >80	PF >0.9
---	-------------	------	------	---------	---------

Elegant design and fine polish endows it to be installed as modern LED wall light and mirror light applications, slender housing of extruded aluminium, polycarbonate diffuser, integrated driver, cable entry through back side of the luminaire body, excellent perfectly diffused light distribution without visible dark spots, available in three lengths, surface finish in chrome/aluminium/white, delivered with fixing brackets.

DRIVER

Lighting Control
Standard

CRI

Standard
CRI >80 CRI >90

BEAM ANGLE



FINISH

White (WH) Grey (GY) Chrome

TECHNICAL DATA

LED	: SMD 2835 LED
System Power	: 12 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 73 lm/W (@5000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@35°C
UGR	: <20

GENERAL

Mounting	: Surface mounted, Indoor
Housing	: Die-cast aluminium
Heat Sink	: Aluminium
Diffuser / Lens	: Acrylic
Adjustability	: No
Driver Mounting	: Built-in
Emergency kit	: Not available

IP Rating	: IP44
IK Rating	: IK06
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 55°C
Glow-wire test	: 750°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

FT »

LINEA 600

TECHNICAL DATA




LINEA 600



COLOR TEMP.	POWER	LUMENS	CODE
3000K	12 W	795 lm	INT05002-30K
4000K		836 lm	INT05002-40K
5000K		880 lm	INT05002-50K

2700K 3000K 4000K 5000K

DIMENSION

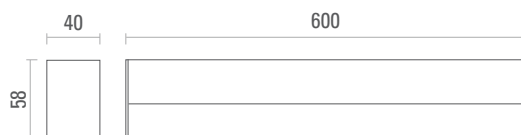

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	



www.switch-made.com

Updated on April 25, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.