



FT




## LINEA 1200

### TECHNICAL DATA



|   |             |      |      |         |         |
|---|-------------|------|------|---------|---------|
|  | 100-240 Vac | IP44 | IK06 | CRI >80 | PF >0.9 |
|---|-------------|------|------|---------|---------|

Elegant design and fine polish endows it to be installed as modern LED wall light and mirror light applications, slender housing of extruded aluminium, polycarbonate diffuser, integrated driver, cable entry through back side of the luminaire body, excellent perfectly diffused light distribution without visible dark spots, available in three lengths, surface finish in chrome/aluminium/white, delivered with fixing brackets.

|            |   |
|------------|---|
| DRIVER     | Lighting Control<br>Standard  |
| CRI        | Standard<br>CRI >80 CRI >90   |
| BEAM ANGLE | <br>120° |
| FINISH     | White (WH) Grey (GY) Chrome   |

#### TECHNICAL DATA

|                    |  |
|--------------------|--|
| LED                | : SMD 2835 LED                                       |
| System Power       | : 24 W   |
| MacAdam Step       | : SDCM <3  |
| Luminaire Efficacy | : 76 lm/W (@5000K)                                   |
| Lifetime           | : L <sub>80</sub> B <sub>10</sub> 50,000Hrs, Ta@35°C |
| UGR                | : <20  |

#### GENERAL

|                 |                           |
|-----------------|---------------------------|
| Mounting        | : Surface mounted, Indoor |
| Housing         | : Die-cast aluminium      |
| Heat Sink       | : Aluminium               |
| Diffuser / Lens | : Acrylic                 |
| Adjustability   | : No                      |
| Driver Mounting | : Built-in                |
| Emergency kit   | : Not available           |

|                      |                               |
|----------------------|-------------------------------|
| IP Rating            | : IP44                        |
| IK Rating            | : IK06                        |
| Protection Class IEC | : II                          |
| Energy Class         | : A+                          |
| Working Temp.        | : -20° to 55°C                |
| Glow-wire test       | : 750°                        |
| Weight               | : -                           |
| Warranty             | : 3 yrs (extendable to 5 yrs) |

2700K 3000K 4000K 5000K

FT »

# LINEA 1200

## TECHNICAL DATA




LINEA 1200



| COLOR TEMP. | POWER | LUMENS  | CODE         |
|-------------|-------|---------|--------------|
| 3000K       | 24 W  | 1680 lm | INT05008-30K |
| 4000K       |       | 1750 lm | INT05008-40K |
| 5000K       |       | 1824 lm | INT05008-50K |

2700K 3000K 4000K 5000K

DIMENSION

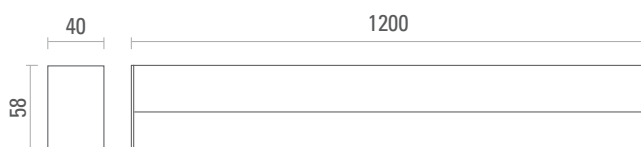

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

|                |  |
|----------------|--|
| PROJECT        |  |
| LUMINAIRE REF. |  |
| QUANTITY       |  |
| DATE           |  |
| Contact Name   |  |
| Mobile         |  |
| Email          |  |



[www.switch-made.com](http://www.switch-made.com)

Updated on April 25, 2022

All technical specifications and datas are subject to modification at any time and without notice.  
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.