



FT



## LINY 24

### TECHNICAL DATA



Optional



	220-240 Vac	IP67	IK07	CRI >80	CREE LED	<b>24Vdc Model</b> (Optional)	RGBW (Optional)
---	-------------	------	------	---------	----------	----------------------------------	--------------------

Higher performance linear wall washing solution with extended range of selection, novel structure without epoxy sealing, extruded aluminium body, tempered glass diffuser, stainless steel support, high heat dissipation and prolonged life span, multi-angle and polarized lens design to maximize utilization of light, flexible and adjustable bracket makes the beam angle more accurate and brings a more extraordinary grazing effect, optional baffle/visor structure for reduced glare and optimized lighting control, 24Vdc model and RGB versions are also available.


DRIVER  
CV, 24 Vdc

Lighting Control  
Standard

CRI

Standard  
CRI >80 CRI >90

BEAM ANGLE

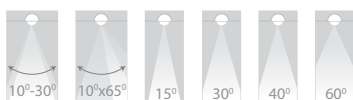

FINISH

Grey (GY) Black (BK)

#### TECHNICAL DATA

LED	: CREE LED
System Power	: 24 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 91 lm/W (@4000K)
Lifetime	: L <sub>80</sub> B <sub>10</sub> 50,000Hrs, Ta@35°C
UGR	: -

#### GENERAL

Mounting	: Surface mounted, Outdoor
Housing	: Extruded aluminium (6063)
Heat Sink	: Aluminium
Diffuser / Lens	: Tempered glass
Adjustability	: Yes
Driver Mounting	: External
Emergency kit	: Not available

IP Rating	: IP67
IK Rating	: IK07
Protection Class IEC	: I
Energy Class	: A+
Working Temp.	: -20° to 55°C
Glow-wire test	: 750°
Weight	: 2.28 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K 6000K 6500K

FT »

# **LINEY 24** TECHNICAL DATA




LINEY 24



COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	24 pcs.	24 W	2000 lm	EXT12034-27K
3000K			2110 lm	EXT12034-30K
4000K			2160 lm	EXT12034-40K

2700K 3000K 4000K 5000K 6000K 6500K

DIMENSION

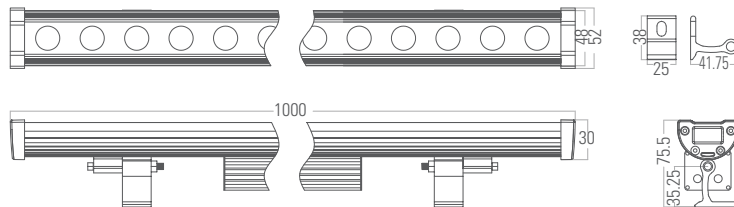

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 25, 2022

All technical specifications and datas are subject to modification at any time and without notice.  
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.