



FT






MIRAGE 1-28 R

TECHNICAL DATA



| | | | | | | |
|---|---------------------|------|----------|-------------------------|--------------------|---|
|  | 220-240V 50-60Hz | IP43 | 100 lm/W | CITIZEN 1208 COB LED | CRI >80/>90/>97 | DIMMABLE DALI/1-10V Optional |
|---|---------------------|------|----------|-------------------------|--------------------|---|

High efficient gimbal downlight with single round trim, precise and variable accent lighting in the shop and retail sector, elegant optical design, outstanding quality of light with high visual comfort, housing made of die-cast aluminium with sand white/black powder-coated finishing, passive aluminium sheet heatsink ensuring better heat dissipation, high reflection ratio aluminium reflector, durable, SDCM<2, dimmable versions available, diverse beam angle choices.

| | | | |
|----------------------------|---|---|------------|
| DRIVER CC, 700mA, 35Vdc | Lighting Control | | |
| | Standard | Phase Dim. | 1-10V DALI |
| CRI | Standard | | |
| | CRI >80 | CRI >90 | CRI >97 |
| BEAM ANGLE |  | | |
| | 24° | 36° | 45° |
| FINISH | White (WH) Black (BK) | | |
| |  |  | |

TECHNICAL DATA

| | |
|--------------------|--|
| LED | : CITIZEN 1208 |
| MacAdam Step | : <3 SDCM |
| Luminaire Efficacy | : 94 lm/W (@4000K) |
| Lifetime | : L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C |
| UGR | : <10 |

GENERAL

| | |
|-----------------|----------------------------|
| Mounting | : Ceiling recessed, Indoor |
| Housing | : Die-cast aluminium |
| Reflector | : Aluminium |
| Diffuser | : Clear glass |
| Adjustability | : Yes |
| Driver mounting | : Remote |
| Emergency kit | : Optional |

| | |
|----------------------|-------------------------------|
| IP Rating | : IP43 |
| IK Rating | : IK04 |
| Protection Class IEC | : II |
| Energy Class | : A+ |
| Working Temp. | : -20° to 50°C |
| Glow-wire test | : 960°C |
| Weight | : 0.78 Kg |
| Warranty | : 3 yrs (extendable to 5 yrs) |

2700K 3000K 4000K 5000K

FT »

MIRAGE 1-28 R

TECHNICAL DATA

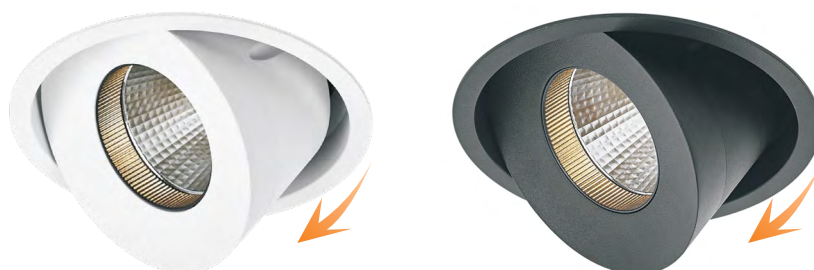
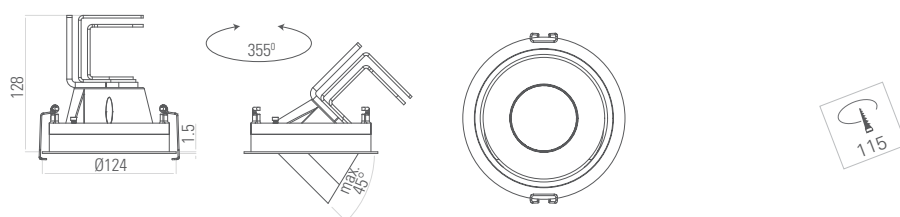


MIRAGE 1-28 R



| COLOR TEMP. | POWER | CRI | LUMENS | CODE |
|-------------|-------|-----|---------|--------------|
| 2700K | 28 W | 90+ | 2310 lm | INT06083-27K |
| 3000K | | | 2500 lm | INT06083-30K |
| 4000K | | | 2620 lm | INT06083-40K |

DIMENSION



NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

| | |
|----------------|--|
| PROJECT | |
| LUMINAIRE REF. | |
| QUANTITY | |
| DATE | |
| Contact Name | |
| Mobile | |
| Email | |

www.switch-made.com

Updated on April 18, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.