




FT »

NEONFLEX 1615

TECHNICAL DATA

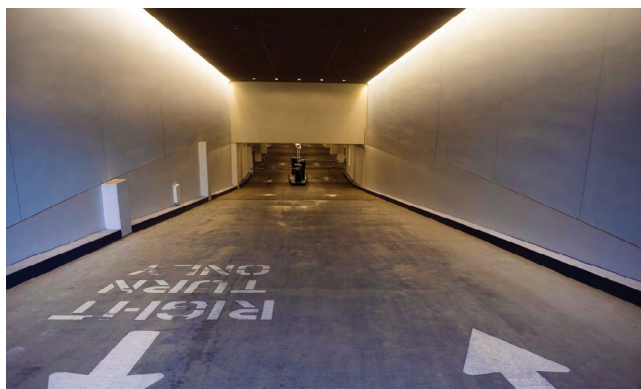

Functional Lighting: Indoor, outdoor, corridors, roof corners and edges, coves.

LED: SMD 2835

Lifetime: 50,000 hrs.

Working Temperature: -20° C to +50°C

CCT: 2300K/2700K / 3000K/ 4000K/ 4500K/R/G/B/ RGB

Beam Angle: 160°

Material/Process: Silicone, integrated extrusion molding

Bending Direction: Top bend

Bending Radius: >60mm


Weight: 3.15 Kg / 15m

3 Years Warranty


2300K 2700K 3000K 4000K 5000K



DIMENSION

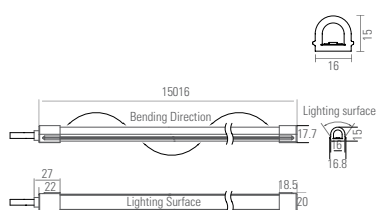

BEAM ANGLE



FINISH

White (WH)

Recommended Accessories



Gum filler



Flat mounting
PC groove



Flat mounting
PC Clip



End cap



Wire



Waterproof
Connectors


●● TECHNICAL CHARACTERISTICS

INPUT VOLTAGE	IP	CCT	W/M	LUMEN/M	CRI	CUTTING UNIT (MM)	DIMENSION (MM)	BENDING RADIUS(MM)	CODE
24Vdc	IP67	2700K	11 W/m	780 lm/m	80+	41.66mm	W16 x H15 x L15000 mm	>60mm	NFX1615-27K
		3000K		800 lm/m					NFX1615-30K
		4000K		820 lm/m					NFX1615-40K


●● NEONFLEX FAMILY

Side bend



NEONFLEX 0410



NEONFLEX 0612




NEONFLEX 1217



Top bend



NEONFLEX 1312



NEONFLEX 1615



NEONFLEX 1515



NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	