



FT




NICKEL 10-W

TECHNICAL DATA



	220-240V 50-60Hz	IP44	100 lm/W	BRIDGELUX V8 LED	CRI >80/>90/>97	DIMMABLE DALI/1-10V Optional
---	---------------------	------	----------	---------------------	--------------------	---

High quality deep recessed wallwasher downlight to illuminate and display vertical surfaces, elegant optical design, for precise and diverse accent and vertical lighting, high visual comfort with very good glare-control, housing made of machined aluminium with sand white/black powder-coated finishing, passive extruded aluminium heatsink ensuring better heat dissipation, high reflection ratio aluminium reflector, durable and robust structure, ideal for art museums, foyers, corridors and reception areas.

DRIVER CC,500mA,18.5Vdc	Lighting Control Standard <input type="checkbox"/> Phase Dim. <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input type="checkbox"/>
CRI	Standard <input type="checkbox"/> CRI >80 <input type="checkbox"/> CRI >90 <input type="checkbox"/> CRI >97 <input type="checkbox"/>
BEAM ANGLE	
FINISH	White (WH) <input type="checkbox"/>

TECHNICAL DATA

LED	: BRIDGELUX V8
MacAdam Step	: <3 SDCM
Luminaire Efficacy	: 85 lm/W (@4000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: <19

GENERAL

Mounting	: Ceiling recessed, Indoor
Housing	: Die-cast aluminium
Reflector	: Aluminium
Diffuser	: Clear glass
Adjustability	: No
Driver mounting	: Remote
Emergency kit	: Optional

IP Rating	: IP43
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 50°C
Glow-wire test	: 960°C
Weight	: 0.52 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K

FT »

NICKEL 10-W

TECHNICAL DATA




NICKEL 10-W



COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	710 lm	INT06052-27K
3000K			780 lm	INT06052-30K
4000K			850 lm	INT06052-40K

2700K 3000K 4000K 5000K

DIMENSION

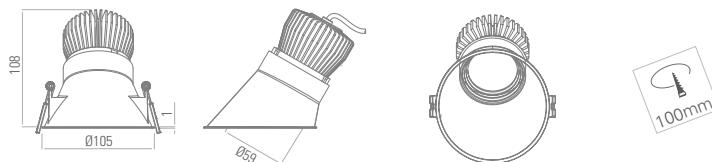

OPTIONAL

Finish: Purple (PP) Sand White (SW) Blue (BL) Sand Black (SB) Aquamarine (AM)
Sand Nickel Grey (NG) Gold (GD) Gold Grey (GG)



NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 18, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.