



FT



PALAOS DESIGN FRAMELESS TECHNICAL DATA



	220-240 50 Hz	PF > 0.95	IP40	CRI >80	IK07	1-10V/DALI Optional
---	------------------	--------------	------	------------	------	------------------------

Framless panel, there is no visible frame when you light it up, be able to connect one by one into different shapes, diversified installation way, it is ideal products to build the panel ceiling and panel wall, diffuser and LGP are PMMA, anti yellowing.

DRIVER
CC, 900mA, 27-55 Vdc

	Lighting Control
Standard	Phase Dim. 1-10V DALI

CRI

Standard	CRI >80	CRI >90	CRI >97
----------	---------	---------	---------

BEAM ANGLE



FINISH

White (WH)

TECHNICAL DATA

LED	: BRIDGELUX SMD LED
System Power	: 36 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 110 lm/W (@4000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: < 22

GENERAL

Mounting	: Ceiling Recessed, Indoor
Housing	: Extruded aluminium body
Heatsink	: Aluminium
Diffuser	: PMMA
Adjustability	: No
Driver Mounting	: Remote
Emergency kit	: Optional

IP Rating	: IP40
IK Rating	: IK07
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 55°C
Glow-wire test	: 650°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 6000K

FT »

PALAOS DESIGN FRAMELESS

TECHNICAL DATA




PALAOS DESIGN FRAMELESS



DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
595 W x 595 L x 16.7 H	4000K	36 W	3420 lm	INT13172-40K
595 W x 595 L x 16.7 H	5000K		3600 lm	INT13172-50K
295 W x 1195 L x 16.7 H	4000K		3420 lm	INT13174-40K

3000K 4000K 5000K 6000K

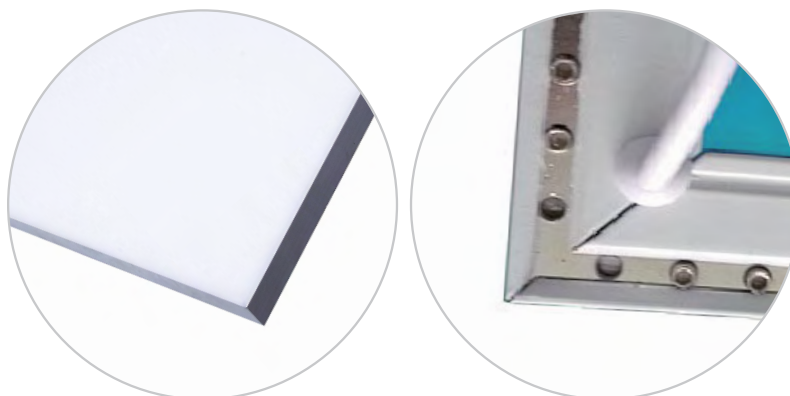

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 18, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.