




FT



PALAOS IP65

TECHNICAL DATA



	100-277V LED driver IP67	PF > 0.95	IK08	IP65	100 lm/w	1-10V/DALI Optional
---	-----------------------------	--------------	------	------	-------------	------------------------

Our IP65 panels have been thoroughly and rigorously tested to achieve their IP65 rating, specially conceived for white chambers, hospital and wet applications, structure thickness of 10mm, suitable for T-bar lay-in installation, IP rated remote driver.

DRIVER CC, 950mA, 28-50 Vdc	Lighting Control
Standard	Phase Dim. 1-10V DALI
CRI	Standard
	CRI >80 CRI >90 CRI >97
BEAM ANGLE	110°
FINISH	White (WH)

TECHNICAL DATA

LED	: SAMSUNG SMD
System Power	: 40 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 105 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C
UGR	: < 22

GENERAL

Mounting	: Ceiling Recessed, Indoor
Housing	: Extruded aluminium body
Heatsink	: Aluminium
Diffuser	: PMMA
Adjustability	: No
Driver Mounting	: Remote
Emergency kit	: Optional

IP Rating	: IP65
IK Rating	: IK07
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 55°C
Glow-wire test	: 650°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 6000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

FT »

PALAO5 IP65

TECHNICAL DATA




PALAO5 IP65



DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
600 W x 600 L x 10 H	3000K	40 W	3850 lm	INT13263-30K
	4000K		4000 lm	INT13263-40K
	6000K		4200 lm	INT13263-60K

3000K 4000K 5000K 6000K

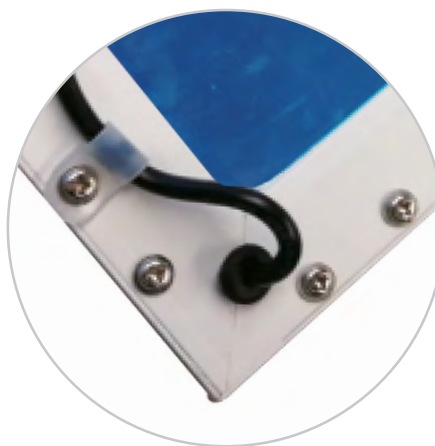

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 18, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.