



FT



PIXEL LINE

TECHNICAL DATA



	220-240 Vac	IP20	90 lm/W	CRI > 80	UGR<19	BRIDGELUX 5050 LED	DIMMABLE 1-10V/DALI Optional
--	-------------	------	---------	----------	--------	--------------------	------------------------------------

Innovative and elegant linear pendant luminaire suit for accent and general lighting, with micro optic reflector achieves homogenous light distribution, glare-free direct component for high level of visual comfort, available in multiple dimensions, beam angles and installing modes, frosted diffuser and combined options, body made of tensile aluminium body.

DRIVER	Lighting Control			
	Standard	Phase Dim.	1-10V	DALI
CRI	Standard			
	CRI >80	CRI >90	CRI >95	
BEAM ANGLE				
	15°	30°	45°	
FINISH				
	White (WH)	Grey (GY)	Black (BK)	

TECHNICAL DATA

LED	: BRIDGELUX 5050
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 94 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C
UGR	: < 19

GENERAL

Mounting	: Suspended, Indoor
Housing	: Extruded aluminium
Heatsink	: Aluminium
Diffuser	: PMMA
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP20
IK Rating	: IK06
Protection Class IEC	: II
Energy Class	: A++
Working Temp.	: -20° to 55°C
Glow-wire test	: 650°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K


PIXEL LINE




COLOR TEMP.	POWER	LUMENS	DIMENSION	CODE
4000K	20 W	1600 lm	600 L x 39 W x 75 H	INT04201-40K
4000K	30 W	2400 lm	900 L x 39 W x 75 H	INT04202-40K
4000K	40 W	3200 lm	1200 L x 39 W x 75 H	INT04203-40K
4000K	50 W	4000 lm	1500 L x 39 W x 75 H	INT04204-40K

2700K 3000K 4000K 5000K

DIMENSION

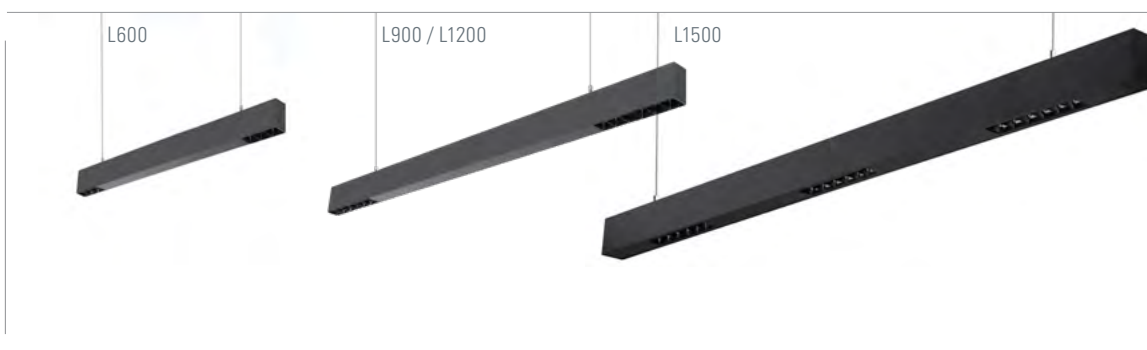

OPTIONAL (Accessories)

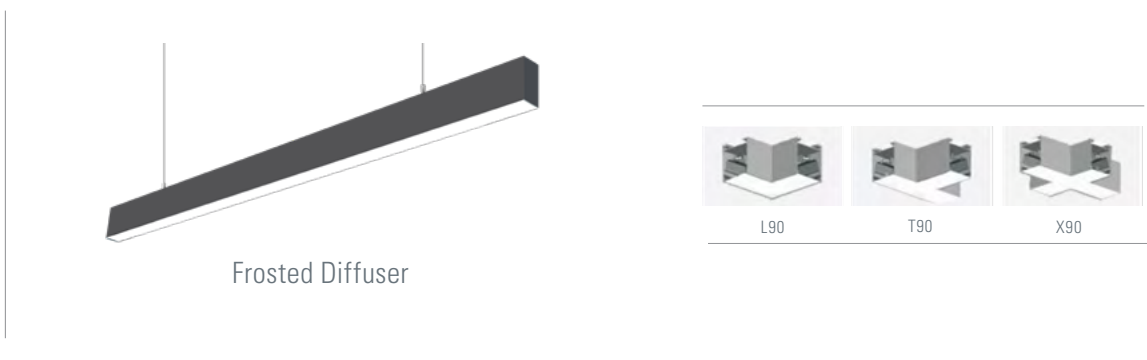

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	