



FT



ROTOR 15

TECHNICAL DATA



	230 Vac	IP20	CITIZEN COB LED	CRI >80	DIMMABLE DALI/0-10V <i>Optional</i>
---	---------	------	-----------------	---------	--

Aesthetically designed directional spotlight for commercial shop and retail sector, quality accent lighting with good color rendering and high uniformity, rotationally symmetric light distribution, full of flexibility and creativity with 350° rotatable and 35° outward tiltable function for ideal highlighting without shadowing, remote driver, body made of diecast aluminium, faceted reflector, 10W model in smaller dia of 96 mm also available.


DRIVER
CC, 350mA, 25-42 Vdc

Lighting Control	Standard
	Phase Dim. 1-10V DALI

CRI

Standard
CRI >80

BEAM ANGLE



FINISH

White (WH)	Black (BK)
	

TECHNICAL DATA

LED	: CITIZEN COB
System Power	: 15 W
Macadam Step	: SDCM <3
Luminaire Efficacy	: 118 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@35°C
UGR	: -

GENERAL

Mounting	: Ceiling recessed, Indoor
Housing	: ADC 12 die-cast aluminium
Reflector	: Aluminium
Diffuser	: Clear glass
Adjustability	: Yes
Driver Mounting	: Remote
Emergency kit	: Optional

IP Rating	: IP20
IK Rating	: IK05
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -20° to 50°C
Glow-wire test	: 850°
Weight	: 0.57 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

FT »

ROTOR 15 TECHNICAL DATA





ROTOR 15



COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	15 W	80+	1580 lm	INT04465-27K
3000K			1660 lm	INT04465-30K
4000K			1780 lm	INT04465-40K

2700K 3000K 4000K 5000K

DIMENSION

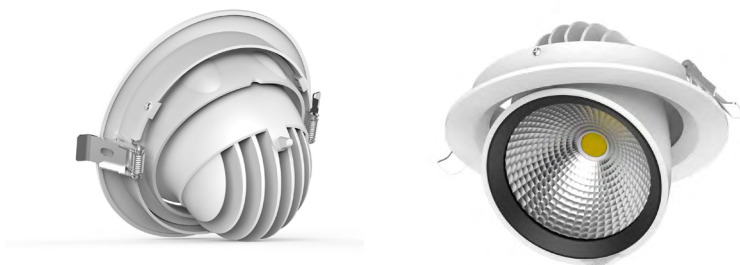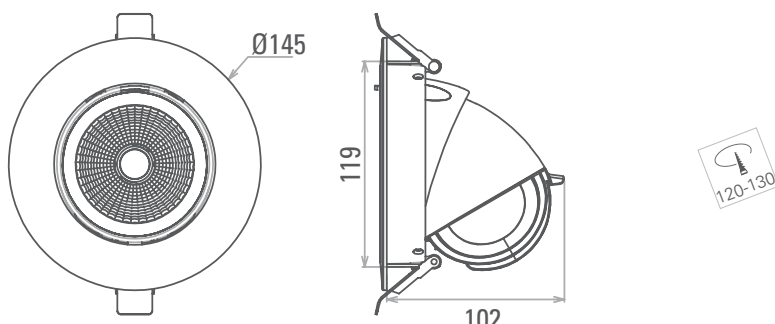

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

•
•
www.switch-made.com

Updated on May 12, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.