




FT



SHERKO 100

TECHNICAL DATA



	100-240 Vac	IP65	IK08	100 lm/W	CRI >70	BRIDGELUX SMDLED	PF >0.9
---	-------------	------	------	----------	---------	------------------	---------

High efficient LED street light, consistent light distribution, delivers excellent lighting levels whilst also providing the right ambiance for all urban application areas, no upwards dispersion of light distribution, high strength aluminium alloy die-cast, powder coated body, high-performance optical lens, light transmittance of 95%, high visual comfort and low glare, stainless steel fasteners, easy to install and maintenance free.


DRIVER

Lighting Control
Standard

CRI

Standard
CRI >70 CRI >80

BEAM ANGLE



FINISH

White (WH) Grey (GY) Black (BK)

TECHNICAL DATA

LED	: BRIDGELUX SMD LED
System Power	: 100 W
MacAdam Step	: SDCM <4
Luminaire Efficacy	: 100 lm/W (@5000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C
UGR	: -

GENERAL

Mounting	: Pole mounted, Outdoor
Housing	: Aluminium die-cast
Diffuser	: Tempered glass
Heat sink	: Aluminium
Adjustability	: Yes
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP65
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A+
Working Temp.	: -20° to 55°C
Glow-wire test	: 750°
Weight	: 6.10 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K

FT »

SHERKO 100

TECHNICAL DATA


SHERKO 100




COLOR TEMP.	POWER	LUMENS	CODE
3000K	100 W	9000 lm	EXT13086-30K
4000K		9500 lm	EXT13086-40K
5000K		10000 lm	EXT13086-50K

2700K 3000K 4000K 5000K 6500K

DIMENSION

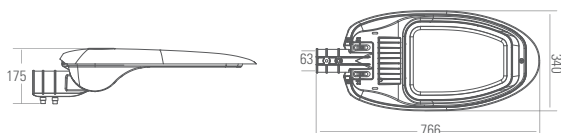

Aluminium Die-cast Body

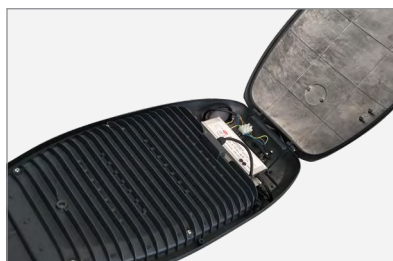

Better Heat Dissipation

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	