



FT



# SIGMA 1510

## TECHNICAL DATA



	200-240 Vac	IP54	CRI >80	SMD LED
---	----------------	------	------------	---------

Surface mounted wall light with dual side illumination, discreet and integrative design to use with architectural surroundings, glare free light and enhanced visual comfort, body made of aluminium, ideal solution for building façade, exterior walls, entrance zones, interior spaces.

DRIVER  
CC, 120mA, 60-80 Vdc

Lighting Control  
Standard

CRI

Standard  
CRI >80

BEAM ANGLE



FINISH

Black (BK)

### TECHNICAL DATA

LED	: SMD LED
System Power	: 10 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 50 lm/W (@4000K)
Lifetime	: L <sub>80</sub> B <sub>10</sub> 50,000Hrs, Ta@25°C
UGR	: <14

### GENERAL

Mounting	: Surface Mounted, Indoor, outdoor
Housing	: ADC 12 Die-cast Aluminum
Heat sink	: Aluminium
Diffuser	: PC
Adjustability	: No
Driver mounting	: Inbuilt
Emergency kit	: Not available

IP Rating	: IP54
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A+
Working Temp.	: -20° to 50°C
Glow-wire test	: 750°C
Weight	: 0.54 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 5000K 5700K

FT »

# SIGMA 1510

## TECHNICAL DATA




### SIGMA 1510




COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	400 lm	INT20138-30K
4000K		500 lm	INT20138-40K
5000K		590 lm	INT20138-50K

3000K 4000K 5000K 5700K

### DIMENSION

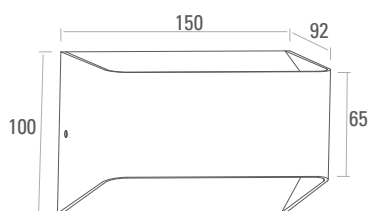

### APPLICATION

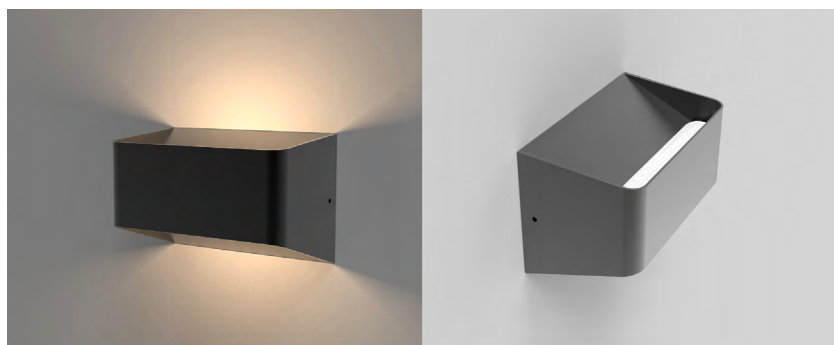

### NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on May 12, 2022

All technical specifications and datas are subject to modification at any time and without notice.  
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.