

FT



SILL

TECHNICAL DATA



	100-240 Vac	IP65	IK08	CRI >80	PF >0.9	CREE LED
---	-------------	------	------	---------	---------	----------

Sleek and slim window perimeter lighting for outdoor application, precise ellipsoidal light beam for focused illumination, discreet with no visible screws, small dimensions to appear invisible when installed on window surrounds, adapts to all window types and windowsill inclinations, die-cast aluminium compact body, with high corrosion resistance powder coating, polycarbonate diffuser.

DRIVER
CC,800mA, 8-14Vdc

Lighting Control
Standard

CRI

Standard
CRI >80 CRI >90

BEAM ANGLE



FINISH

White (WH) Grey (GY) Black (BK)

TECHNICAL DATA

LED	: CREE XPG
System Power	: 10 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 80 lm/W (@5000K)
Lifetime	: L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	: -

GENERAL

Mounting	: Surface mounted, Outdoor
Housing	: Die-cast aluminium
Heat Sink	: Aluminium
Lens	: PC
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP65
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 55°C
Glow-wire test	: 850°
Weight	: 0.50 Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.


FT »

SILL

TECHNICAL DATA




SILL



COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
3000K	3 pcs.	10 W	720 lm	EXT05141-30K
4000K			750 lm	EXT05141-40K
6000K			800 lm	EXT05141-60K

3000K 4000K 6000K

DIMENSION

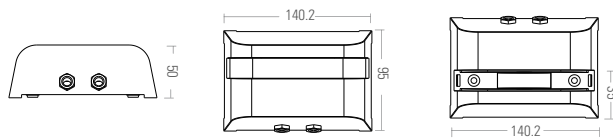

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT
LUMINAIRE REF.
QUANTITY
DATE

Contact Name
Mobile
Email



www.switch-made.com

Updated on April 21, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.