


Optional



Daylight
Sensor



Motion
Sensor



CCT
Changing





FT »

STANDY PIXEL

TECHNICAL DATA

100-240 Vac	IP20	130 lm/W	CRI > 80/>90	UGR<6	LUMILED LED LUXEON3030	DIMMABLE 1-10V
----------------	------	-------------	-----------------	-------	---------------------------	-------------------

Innovative and elegant LED floor lamp, best in class design and modularity series from PIXEL range, compact and quality appearance, patent design with rich texture and high visual impact, high lumen efficiency, qualitative thermoplastic black finish micro reflector design ensures very low glare values, independent control to direct and indirect lighting distribution, optional smart control functions.

DRIVER	Lighting Control		
	Standard	Phase Dim.	1-10V
C R I	Standard		
	CRI >80	CRI >90	CRI >97
BEAM ANGLE			
	50°		
FINISH	<i>White (WH)</i> <i>Grey (GY)</i> <i>Black (BK)</i>		
	  		

TECHNICAL DATA

LED	:	LUMILED LUXEON3030 LED
System Power	:	80 W
MacAdam Step	:	SDCM <4
Luminaire Efficacy	:	130 lm/W (@5000K)
Lifetime	:	L ₇₀ B ₅₀ 50,000Hrs, Ta@35°C
UGR	:	<6

GENERAL

Mounting	:	Stand alone, Indoor
Housing	:	Aluminum Profile
Reflector	:	Aluminum
Diffuser	:	PMMA
Adjustability	:	No
Driver mounting	:	Integrated
Emergency kit	:	Not available
IP Rating	:	IP20
IK Rating	:	IK06
Protection Class IEC	:	I
Energy Class	:	A+
Working Temp.	:	-20° to 45°C
Glow-wire test	:	650°C
Weight	:	4.60 Kg
Warranty	:	3 yrs (extendable to 5 yrs)

3000K 4000K 6000K

FT »

STANDY PIXEL

TECHNICAL DATA




STANDY PIXEL



COLOR TEMP.	POWER	LUMENS	CODE
4000K	↑ 55 W x 25 W ↓	↑ 6800 lm x 3000 lm ↓	INT04189-40K
5000K	↑ 55 W x 25 W ↓	↑ 7150 lm x 3250 lm ↓	INT04189-50K

3000K 4000K 6000K

DIMENSION

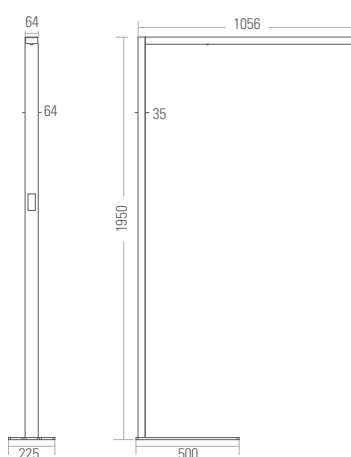

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 26, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.