



FT






STRONG 92

TECHNICAL DATA



	220-240 Vac	IP65	IK06	CRI >80/>90	PF >0.9	DALI/1-10V <i>Optional</i>
---	-------------	------	------	-------------	---------	--------------------------------------

Highly durable ceiling recessed outdoor-rated IP65 downlight, die-cast aluminum fitting with a powder-coated finish for extreme outdoor environments, glare-proof optical design with UGR<20, high visual comfort, maximum mechanical resistance for dust and moisture, vandal-resistant, IP rated gland, best suitable for building entrance lighting, canopy/terrace lighting, airports, industries.

DRIVER CC 36V	Lighting Control		
	Standard	Phase Dim.	1-10V DALI
CRI	Standard		
	CRI >80	CRI >90	
BEAM ANGLE			
	24°	36°	50°
FINISH	White (WH) Black (BK)		
			

TECHNICAL DATA

LED	:	LUMINUS COB LED
System Power	:	15 W
MacAdam Step	:	SDCM <3
Luminaire Efficacy	:	90 lm/W (@5000K)
Lifetime	:	L ₈₀ B ₁₀ 50,000Hrs, Ta@35°C
UGR	:	<20

GENERAL

Mounting	:	Ceiling Recessed, Indoor
Housing	:	Die-cast Aluminium
Heatsink	:	Extruded Aluminium
Diffuser	:	Tempered glass
Reflector	:	High reflectance aluminium
Adjustability	:	No
Driver Mounting	:	Remote
Emergency kit	:	Not available

IP Rating	:	IP65
IK Rating	:	IK06
Protection Class IEC	:	I
Energy Class	:	A+
Working Temp.	:	-20° to 60°C
Glow-wire test	:	960°
Weight	:	-
Warranty	:	3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K

FT »

STRONG 92

TECHNICAL DATA




STRONG 92




COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1275 lm	EXT19028-30K
4000K		1320 lm	EXT19028-40K
5000K		1350 lm	EXT19028-50K

2700K 3000K 4000K 5000K


DIMENSION

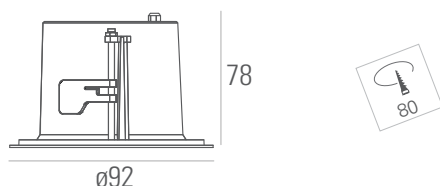


OPTIONAL



OVAL LENS



FLOOD LENS



HONEYCOMB

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 21, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.