

FT »

VENTI 2T

TECHNICAL DATA

	100-240 Vac	IP65	IK08	CRI >80	SMD LED
---	-------------	------	------	---------	---------

Best of the class and innovative bollard, triangular shaped body, highly homogenous, harmonious and glare-less planar light distribution, higher creep resistance, extruded aluminium and die-cast aluminium housing for standard version, UV resistant powder-coat finish, stainless steel screws, fire-resistant silicone seal waterproof gasket, integrated driver.

DRIVER | Lighting Control
Standard

CRI | Standard
CRI >80

BEAM ANGLE |  360°

FINISH | *Black (BK)*
RAL 9005 *Grey (GY)*
RAL 9006

TECHNICAL DATA

LED	: SMD LED
System Power	: 15 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 70 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C

GENERAL

Mounting	: Surface mounted, Outdoor
Housing	: Die-cast aluminium
Diffuser	: PC
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: NA

IP Rating	: IP65
IK Rating	: IK08
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 55°C
Glow-wire test	: 650°
Weight	: - Kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K

FT »

VENTI 2T

TECHNICAL DATA




VENTI 2T



COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	990 lm	EXT12080-30K
4000K		1050 lm	EXT12080-40K

3000K 4000K

DIMENSION

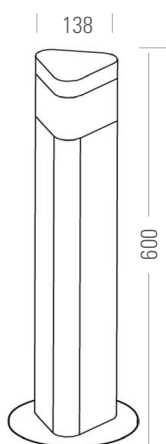

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 21, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.