

FT



VICE VERSA PIXEL 1

TECHNICAL DATA



IP20	130 lm/W	CRI > 80/>90	UGR<6	SAMSUNG 2835 LED	DIMMABLE 1-10V/DALI Optional
------	-------------	-----------------	-------	---------------------	------------------------------------

Innovative modular design concept LED direct-indirect (up/down) pendant light, best in class design and modularity series from PIXEL range, compact and quality appearance, patent design with rich texture and visual impact, high lumen efficiency, micro reflector design, easily linkable solution, material made of 6063AL aluminium alloy, surface-mounted, recessed, semi-recessed, suspended and design variations for a wide spectrum of applications.

DRIVER	Lighting Control		
	Standard	1-10V	DALI
CRI	Standard		
	CRI >80	CRI >90	CRI >95
BEAM ANGLE	115° (UP)		
	50° (DOWN)		
FINISH	White (WH)		
	Grey (GY)	Black (BK)	

TECHNICAL DATA

LED	: SAMSUNG LED
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 130 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C
UGR	: < 6

GENERAL

Mounting	: Suspended, Indoor
Housing	: Extruded aluminium
Heatsink	: Aluminium
Diffuser	: PMMA
Adjustability	: No
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP20
IK Rating	: IK06
Protection Class IEC	: II
Energy Class	: A++
Working Temp.	: -20° to 55°C
Glow-wire test	: 650°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6000K


VICE VERSA PIXEL 1



COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓ 25 W x 25 W ↑	↓ 3080 lm x 3080 lm ↑	INT04205-40K
5000K		↓ 3250 lm x 3250 lm ↑	INT04205-50K

3000K 4000K 6000K

DIMENSION



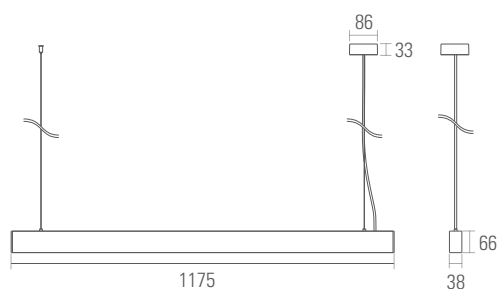


MOPUNTING (Optional)

Recessed

Trimless

Surface Mounted



Linkable design provide
a clean, simple link

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	