



FT »

## VICE VERSA PIXEL 2

### TECHNICAL DATA

|      |             |                 |       |            |                                    |
|------|-------------|-----------------|-------|------------|------------------------------------|
| IP20 | 130<br>lm/W | CRI<br>> 80/>90 | UGR<6 | 100-270Vac | DIMMABLE<br>1-10V/DALI<br>Optional |
|------|-------------|-----------------|-------|------------|------------------------------------|

Innovative modular design concept LED direct-indirect (up/down) pendant light, best in class design and modularity series from PIXEL range, compact and quality appearance, patent design with rich texture and visual impact, homogeneous illumination without hard shadows and minimized glare with a high level of visual comfort, high lumen efficiency, micro reflector design, material made of 6063AL aluminium alloy.

|            |                  |            |         |
|------------|------------------|------------|---------|
| DRIVER     | Lighting Control |            |         |
|            | Standard         | 1-10V      | DALI    |
| CRI        | Standard         |            |         |
|            | CRI >80          | CRI >90    | CRI >95 |
| BEAM ANGLE | 115° (UP)        |            |         |
|            | 50° (DOWN)       |            |         |
| FINISH     | White (WH)       |            |         |
|            | Grey (GY)        | Black (BK) |         |

#### TECHNICAL DATA

|                    |  |
|--------------------|--|
| LED                | : SAMSUNG SMD2835 LED                                |
| POWER              | : 60W  |
| MacAdam Step       | : SDCM <3  |
| Luminaire Efficacy | : 130 lm/W (@4000K)                                  |
| Lifetime           | : L <sub>80</sub> B <sub>10</sub> 50,000Hrs, Ta@25°C |
| UGR                | : < 6  |

#### GENERAL

|                 |                      |
|-----------------|----------------------|
| Mounting        | : Suspended, Indoor  |
| Housing         | : Extruded aluminium |
| Heatsink        | : Aluminium          |
| Diffuser        | : PMMA               |
| Adjustability   | : No                 |
| Driver Mounting | : Integrated         |
| Emergency kit   | : Not available      |

|                      |                               |
|----------------------|-------------------------------|
| IP Rating            | : IP20                        |
| IK Rating            | : IK06                        |
| Protection Class IEC | : II                          |
| Energy Class         | : A++                         |
| Working Temp.        | : -20° to 55°C                |
| Glow-wire test       | : 650°                        |
| Weight               | : -                           |
| Warranty             | : 3 yrs (extendable to 5 yrs) |

3000K 4000K 6000K


### VICE VERSA PIXEL 2



| COLOR TEMP. | POWER           | LUMENS                | CODE         |
|-------------|-----------------|-----------------------|--------------|
| 4000K       | ↓ 30 W x 30 W ↑ | ↓ 3700 lm x 3700 lm ↑ | INT04207-40K |
| 5000K       |                 | ↓ 3900 lm x 3900 lm ↑ | INT04207-50K |

3000K 4000K 6000K

#### DIMENSION

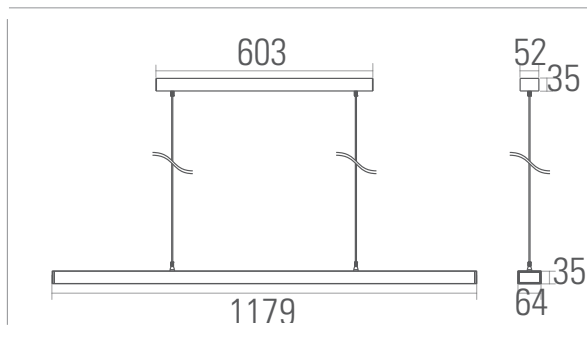

#### NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

|                |  |
|----------------|--|
| PROJECT        |  |
| LUMINAIRE REF. |  |
| QUANTITY       |  |
| DATE           |  |

|              |  |
|--------------|--|
| Contact Name |  |
| Mobile       |  |
| Email        |  |

