



FT



VICE VERSA PIXEL 3

TECHNICAL DATA



IP20	130 lm/W	CRI > 80/>90	UGR<6	100-270V	SAMSUNG 2835 LED	DIMMABLE 1-10V/DALI Optional
------	-------------	-----------------	-------	----------	---------------------	------------------------------------

Innovative slimline construction design concept LED direct-indirect (up/down) pendant light, best in class design and modularity series from PIXEL range, compact and quality appearance, patent design with rich texture and visual impact, homogeneous illumination without hard shadows and minimized glare with a high level of visual comfort, high lumen efficiency, micro reflector design, material made of 6063AL aluminium alloy.

DRIVER	Lighting Control		
	Standard	1-10V	DALI
CRI	Standard		
	CRI >80	CRI >90	CRI >95
BEAM ANGLE	115° (UP)		
	50° (DOWN)		
FINISH	White (WH)		
	Black (BK)		

TECHNICAL DATA

LED	: SAMSUNG2835
LED Qty.	: 176 Pcs.
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 130 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C
UGR	: < 6

GENERAL

Mounting	: Suspended, Indoor
Housing	: Extruded aluminium
Heatsink	: Aluminium
Reflector	: PMMA
Linkable	: Yes
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP20
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A++
Working Temp.	: -20° to 50°C
Glow-wire test	: 650°
Weight	: 5.1 kg
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6000K

FT »

VICE VERSA PIXEL 3

TECHNICAL DATA





VICE VERSA PIXEL 3



COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓ 30 W x 30 W ↑	↓ 3700 lm x 3700 lm ↑	INT04209-40K
5000K		↓ 3900 lm x 3900 lm ↑	INT04209-50K

3000K 4000K 6000K

DIMENSION

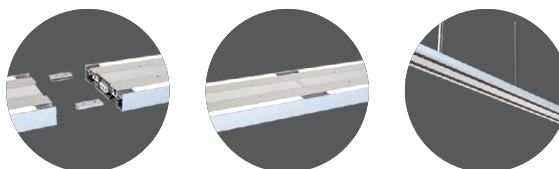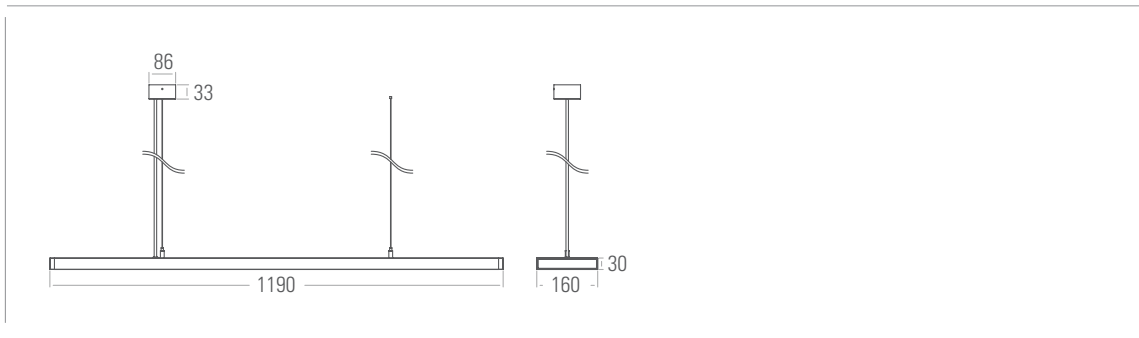

Linkable design provide
a clean, simple link

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	

www.switch-made.com

Updated on April 21, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.