

FT




VICE VERSA WALL

TECHNICAL DATA



IP20	100 lm/W	CRI > 80/>90	UGR<19	DIMMABLE 1-10V/DALI Optional
------	-------------	-----------------	--------	------------------------------------

High efficient LED wall light slimline flat construction, direct-indirect lighting with impressive lighting uniformity and creates harmonious room atmosphere, homogeneous illumination without hard shadows and minimised glare with a high level of visual comfort, integrated driver, material made of 6063AL aluminium alloy with visible luminaire height of 30mm, best suitable for hospital, hotels, residential applications.

DRIVER	Lighting Control			
	Standard	Phase Dim.	1-10V	DALI
CRI	Standard			
	CRI >80			
BEAM ANGLE				
	120°			
FINISH	White (WH)			
	Silver (SL)			

TECHNICAL DATA

LED	: CREE LED
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 100 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C
UGR	: < 19

GENERAL

Mounting	: Surface Mounted, Indoor
Housing	: 6063 Aluminium
Heatsink	: Aluminium
Diffuser	: PMMA
Driver Mounting	: Integrated
Emergency kit	: Not available

IP Rating	: IP20
IK Rating	: IK04
Protection Class IEC	: II
Energy Class	: A++
Working Temp.	: -20° to 50°C
Glow-wire test	: 650°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.


FT »

VICE VERSA WALL

TECHNICAL DATA




VICE VERSA WALL



COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓ 20 W x 20 W ↑	↓ 2000 lm x 2000 lm ↑	INT04211-40K
5000K		↓ 2150 lm x 2150 lm ↑	INT04211-50K

3000K 4000K 6000K

DIMENSION

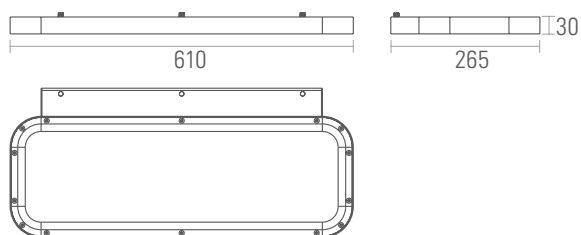

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	



www.switch-made.com

Updated on April 21, 2022

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.