




FT




## DECONUT PENDANT 600

### TECHNICAL DATA



	22-240Vac 50/60Hz	IP20	CRI >80/>90	OSRAM LED	DIMMABLE 1-10V/DALI Optional
---	----------------------	------	----------------	-----------	------------------------------------

The whole series of decorative LED FRAME solution utilizes a uniform extruded aluminium housing with lesser trim size, sleek and seamless design, uniformly lighted through an PC diffuser, streamlined aesthetic, perfect solution for general illumination, high visual comfort, higher stability of color rendition, with surface mounting and suspended options, supplied with power supply.

DRIVER CC	Lighting Control Standard Phase 1-10V DALI
CRI	Standard CRI >80 CRI >90
BEAM ANGLE	 120°
FINISH	White (WH) RAL9016 Black (BK) RAL9004

#### TECHNICAL DATA

LED	: OSRAM 2835 LED
System Power	: 38 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 80lm/W @4000K
Lifetime	: L <sub>80</sub> B <sub>10</sub> 50,000Hrs, Ta@35°C
UGR	: <22

#### GENERAL

Mounting	: Suspended, Indoor
Housing	: Extruded Aluminium
Suspension	: Aircraft Stainless Rope, Metal Ceiling Canopy
Diffuser	: PC (85% Transmittance)
Adjustability	: No
Driver Mounting	: Integrated (Inside canopy for DALI)
Dimmable:	: Optional
Emergency Kit	: NA

IP Rating	: IP20
IK Rating	: IK05
Protection Class IEC	: II
Energy Class	: A+
Working Temp.	: -35°C to 45°C
Glow-wire test	: 960°
Weight	: - Kg.
Warranty	: 3 yrs (extendable to 5 yrs)

3000K 4000K 6000K


### DECONUT PENDANT 600




COLOR TEMP.	POWER	LUMENS	NO. OF PARTS	CODE
3000K	38 W	2750 lm	1	INT20038-30K-38W
4000K		3050 lm		INT20038-40K-38W

3000K 4000K 6000K

#### DIMENSION

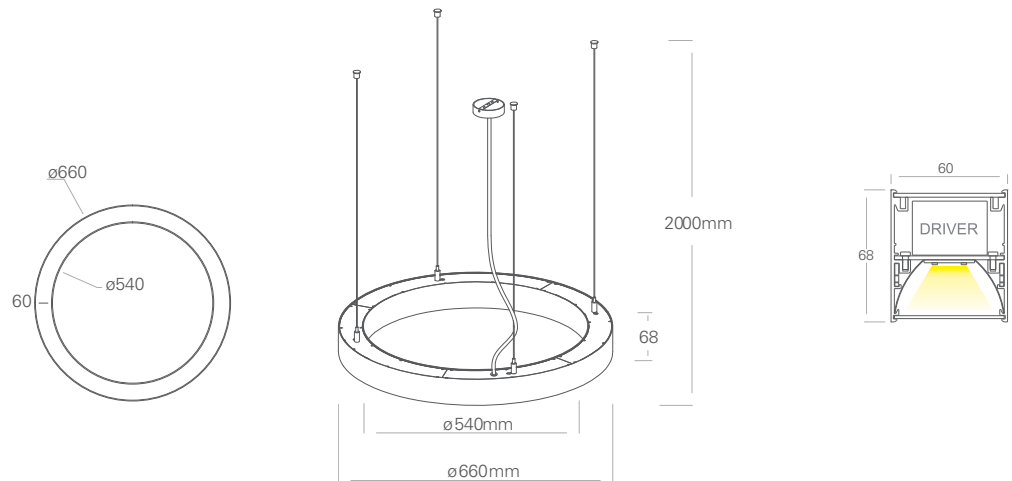

#### NO. OF PARTS

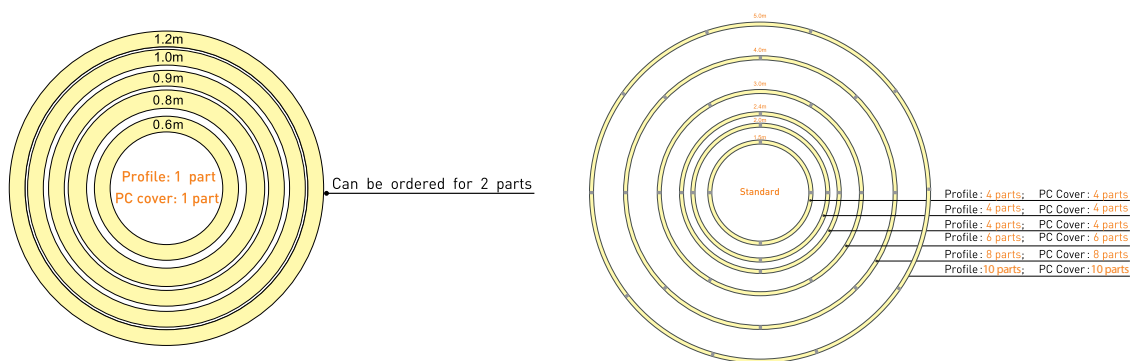

#### NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	