


FT »

## LINE C25100

### TECHNICAL DATA

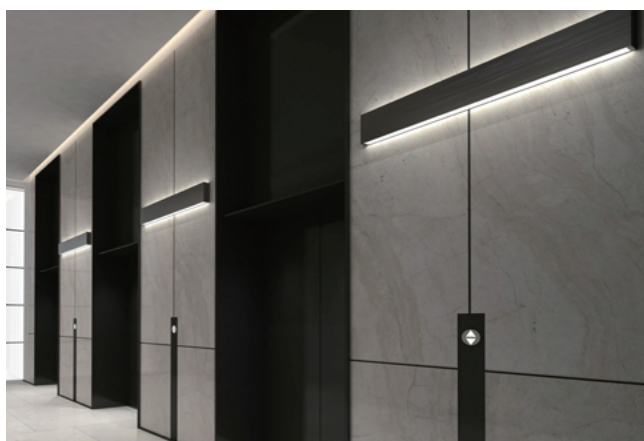

**Code:** PRC25100

**Functional Lighting:** Interior, shop, tertiary, residential

**Lifetime:** 50,000 hrs.

**Working Temperature:** -20°C to +45°C

**Beam Angle:** 110°

**Material:** Aluminium AL6063-T5 (Anodized)

**Diffuser:** PC (Frosted)

**IP Rating:** IP20

**CRI:** 80/90

**Driver:** Integrated (AC220V)

**Length:** 600/1200/1500/1800/2400

**Weight:** 2.00 Kg / 2.5 m

**Process:** Anodic Oxidation / Powder

**3 Years Warranty**


#### DIMENSION




**2700K 3000K 4000K 5000K 6500K**



#### FINISH



| LENGTH  | CRI | POWER            | CCT   | LUMENS/MODULE          | CODE         |
|---------|-----|------------------|-------|------------------------|--------------|
| 600 mm  | 80  | ↑ 7 W<br>↓ 7 W   | 4000K | ↑ 540 lm<br>↓ 540 lm   | PRC25100-14W |
| 1200 mm |     | ↑ 14 W<br>↓ 14 W |       | ↑ 1070 lm<br>↓ 1070 lm | PRC25100-28W |
| 1500 mm |     | ↑ 19 W<br>↓ 19 W |       | ↑ 1340 lm<br>↓ 1340 lm | PRC25100-38W |
| 1800 mm |     | ↑ 23 W<br>↓ 23 W |       | ↑ 1600 lm<br>↓ 1600 lm | PRC25100-46W |
| 2400 mm |     | ↑ 29 W<br>↓ 29 W |       | ↑ 2140 lm<br>↓ 2140 lm | PRC25100-58W |

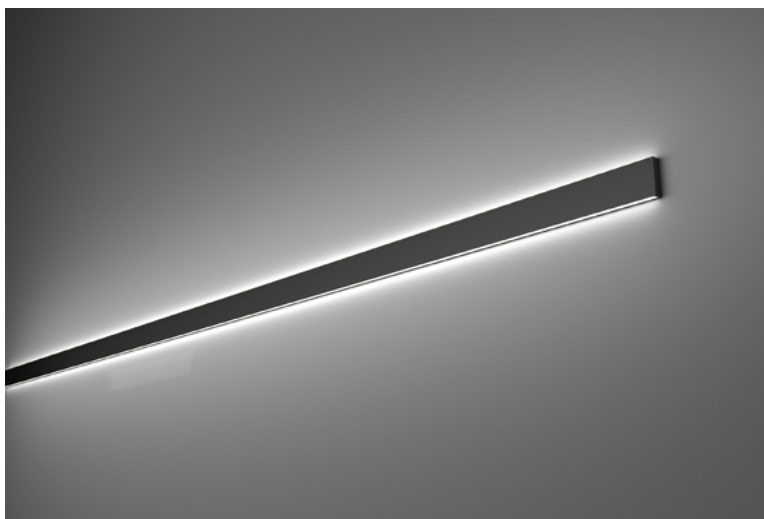

## NOTES

CE RoHS

|                |  |
|----------------|--|
| PROJECT        |  |
| LUMINAIRE REF. |  |
| QUANTITY       |  |
| DATE           |  |
| Contact Name   |  |
| Mobile         |  |
| Email          |  |