



FT



ROCK 100

TECHNICAL DATA



	220-240Vac	IP67	IK10	CRI80	CREE LED
---	------------	------	------	-------	----------

Ground recessed marker-light, versatile choice of wattage and size for pathway lighting, solid construction, good choice of selection with multiple diameters, lumen packages and beam options, excellent consistency of light color, aluminium die-cast body, tempered safety glass, high grade of impact and slipping resistance, delivered with ABS recessed pot.


DRIVER
DC, 24V

Lighting Control
Standard


CRI

Standard
CRI >80


EMITTING
DIRECTION



ROCK 100-I



ROCK 100-II



ROCK 100-IV

FINISH

Aluminium (AL)



TECHNICAL DATA

LED	: CREE LED
System Power	: 10 W
MacAdam Step	: SDCM <3
Luminaire Efficacy	: 50 lm/W (@4000K)
Lifetime	: L ₈₀ B ₁₀ 50,000Hrs, Ta@25°C

GENERAL

Mounting	: Ground recessed, Outdoor
Housing	: Die-cast aluminium body
Heatsink	: Aluminium
Frame Cover	: SS304
Diffuser	: Tempered glass
Back Mounting Sleeve	: ABS
Adjustability	: No
Driver Mounting	: Integrated (Optional Remote 24Vdc)
Emergency kit	: Not available

Drive-over	: Yes
IP Rating	: IP67
IK Rating	: IK10
Protection Class IEC	: I
Energy Class	: A++
Working Temp.	: -20° to 55°C
Glow-wire test	: 850°
Weight	: -
Warranty	: 3 yrs (extendable to 5 yrs)


2700K 3000K 4000K 5000K 6000K

ROCK 100-I



COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	150 lm	EXT19081-30K
4000K		200 lm	EXT19081-40K

ROCK 100-II



COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	290 lm	EXT19082-30K
4000K		330 lm	EXT19082-40K


ROCK 100-IV



COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	450 lm	EXT19083-30K
4000K		500 lm	EXT19083-40K

2700K 3000K 4000K 5000K 6000K

DIMENSION

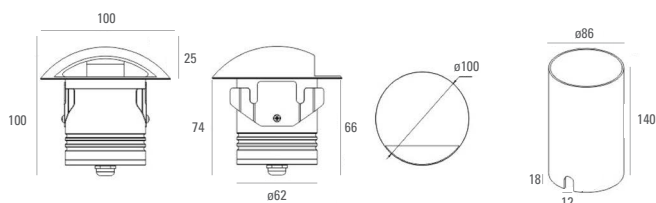

NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	