



FT



ROCK 60

TECHNICAL DATA



	220-240Vac	IP67	IK10	CRI80	CREE LED
---	------------	------	------	-------	----------

Ground recessed marker-light, versatile choice of wattage and size for pathway lighting, solid construction, good choice of selection with multiple diameters, lumen packages and beam options, excellent consistency of light color, aluminium die-cast body, tempered safety glass, high grade of impact and slipping resistance, delivered with ABS recessed pot.


DRIVER


Lighting Control
Standard


CRI

Standard
CRI >80

EMITTING DIRECTION

 ROCK 60-I

 ROCK 60-II

 ROCK 60-IV

FINISH

Aluminium (AL)



TECHNICAL DATA

LED : CREE LED
System Power : 5 W
MacAdam Step : SDCM <3
Luminaire Efficacy : 50 lm/W (@4000K)
Lifetime : L₈₀ B₁₀ 50,000Hrs, Ta@25°C

GENERAL

Mounting : Ground recessed, Outdoor
Housing : Die-cast aluminium body
Heatsink : Aluminium
Frame Cover : SS316
Diffuser : Tempered glass (8mm)
Back Mounting Sleeve : ABS
Adjustability : No
Driver Mounting : Integrated (Optional Remote 24Vdc)
Emergency kit : Not available

Drive-over : Yes
IP Rating : IP67
IK Rating : IK10
Protection Class IEC : I
Energy Class : A++
Working Temp. : -20° to 55°C
Glow-wire test : 850°
Weight : -
Warranty : 3 yrs (extendable to 5 yrs)

2700K 3000K 4000K 5000K 6000K



www.switch-made.com

All technical specifications and datas are subject to modification at any time and without notice.
The rated values (@ta25°C) of luminous flux and electrical load are subject to initial tolerance of +/- 10%. Tolerance of CCT are subject to +/- 150K.

ROCK 60-I



COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	75 lm	EXT19081-30K
4000K		100 lm	EXT19081-40K

ROCK 60-II



COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	145 lm	EXT19082-30K
4000K		165 lm	EXT19082-40K

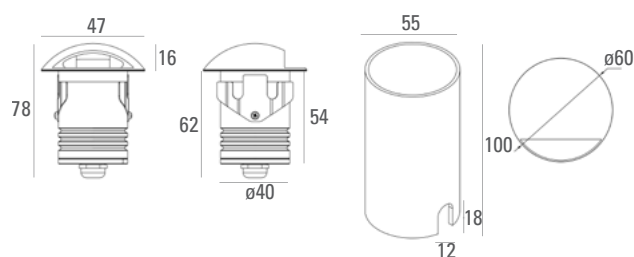
ROCK 60-IV



COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	225 lm	EXT19083-30K
4000K		250 lm	EXT19083-40K

2700K 3000K 4000K 5000K 6000K

DIMENSION



NOTES

ISO DOC. NO.: SM-OPN-QSF08

CE RoHS

PROJECT	
LUMINAIRE REF.	
QUANTITY	
DATE	
Contact Name	
Mobile	
Email	